

RAM PROMASTER

With easy curb and street side deployment, ErgoRack™ eliminates time spent with unsafe loading, unloading and securing practices.

ErgoRack™ fits all Ram ProMaster roof heights and wheel base options.

Gain back time in your day. Improve productivity. Ensure driver safety. ErgoRack™.



HRR-E-PM42 HIGH

Rack + weight of ladders shown is approximately 240 lbs.



The only drop-down ladder rack available to carry a 40' ladder on a Ram ProMaster.



Feet stay safely on the ground.



Reduce back and muscle strain from improper loading.



Hydraulic cylinder provides smoothest, controlled descent of any rack in the industry.



Greatest ladder carrying capacity for Ram ProMaster.



Removable handle – easy access for operators of any height.



Maintain vehicle warranty and resale value with no holes to drill.




Improve productivity – deploy and stow in less than :20 seconds.




Winner of ergonomic awards in USA, France, Germany and Australia.

Scan this QR Code with your mobile device to view a product demo.

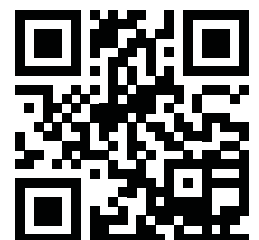



RAM PROMASTER

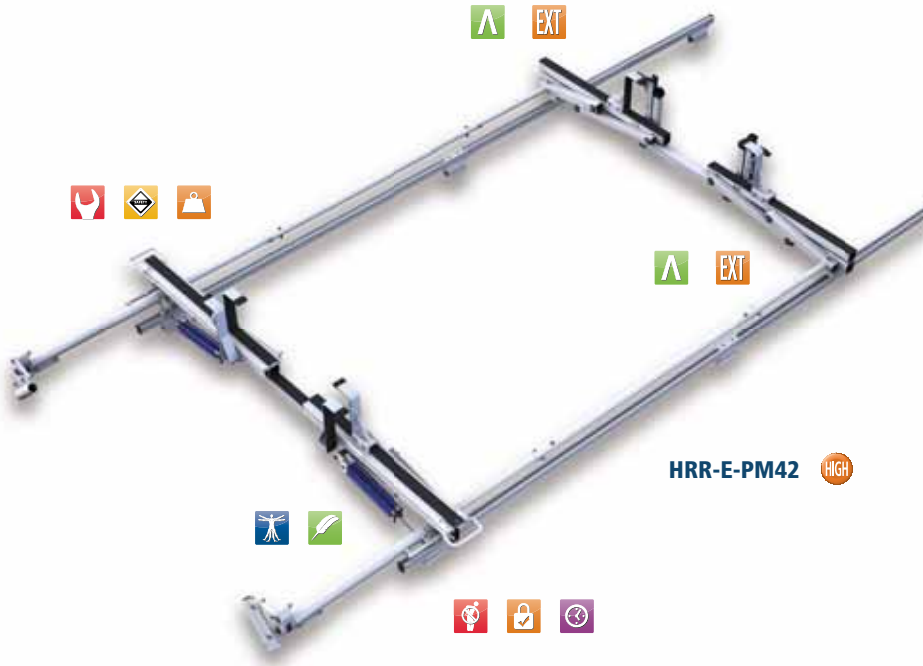

ROTATION WITH SLIDE EXTENSION



ROTATION WITH SLIDE EXTENSION



3RD CROSSBAR

		L1H1		L2H1		L2H2		L4H2		L5H2	
		Wheelbase	118	Wheelbase	136	Wheelbase	136	Wheelbase	159	Wheelbase	159
		Height	90	Height	90	Height	101	Height	101	Height	101
Street Side	Curb Side	Model	Rack WT	Model	Rack WT	Model	Rack WT	Model	Rack WT	Model	Rack WT
Base	Rotation	VBR-E-PM11	72	VBR-E-PM21	74	HBR-E-PM22	82	HBR-E-PM42	87	HBR-E-PM52	91
Rotation	Rotation	VRR-E-PM11	107	VRR-E-PM21	110	HRR-E-PM22	127	HRR-E-PM42	131	HRR-E-PM52	135
Base	Incline	VBI-E-PM11	73	VBI-E-PM21	75	HBI-E-PM22	83	HBI-E-PM42	88	HBI-E-PM52	92
Rotation	Incline	VRI3-E-PM11	111	VRI3-E-PM21	113	HRI3-E-PM22	129	HRI3-E-PM42	135	HRI3-E-PM52	139
Rotation	Rotation	VRR3-E-PM11	109	VRR3-E-PM21	112	HRR3-E-PM22	129	HRR3-E-PM42	133	HRR3-E-PM52	137
Alurack		AR1407	73	AR1418	84	AR1413	78	AR1423	88	AR1425	96

Ship thru configurations are available. All ErgoRacks for H1 (Low Roof) and H2 (High Roof) Ram ProMaster chassis models come with slides. All racks can accommodate 16 foot to 40 foot extension ladders. Rotation ladder rack crossbars can be spaced at six, seven, or eight feet. Ladders 28 feet and longer require 8 foot spacing of crossbars. All racks can accommodate 8 foot step ladders. 8 foot step ladders require 6 foot spacing. For step ladders longer than 8 feet, optional extended rear uppers and slides are available. Part IDs with "3" in the prefix (ex. VRR3) designates a 3rd crossbar. Three crossbar racks allows more flexibility to carry both short and long ladders. A wide range of accessories are available including conduit carriers, light holders, and more. Maximum roof capacity of Ram ProMaster is 330 pounds when using three or more anchor locations.

Step Ladder
 Extension Ladder
 Low Roof (H1)
 High Roof (H2)

FM-7.2-4015 / Rev D / 07-08-2014